




# iLive IKBC384S Power cord and connector Replacement

iLive IKBC384S Power cord and connector Replacement.

Written By: Allen Dover

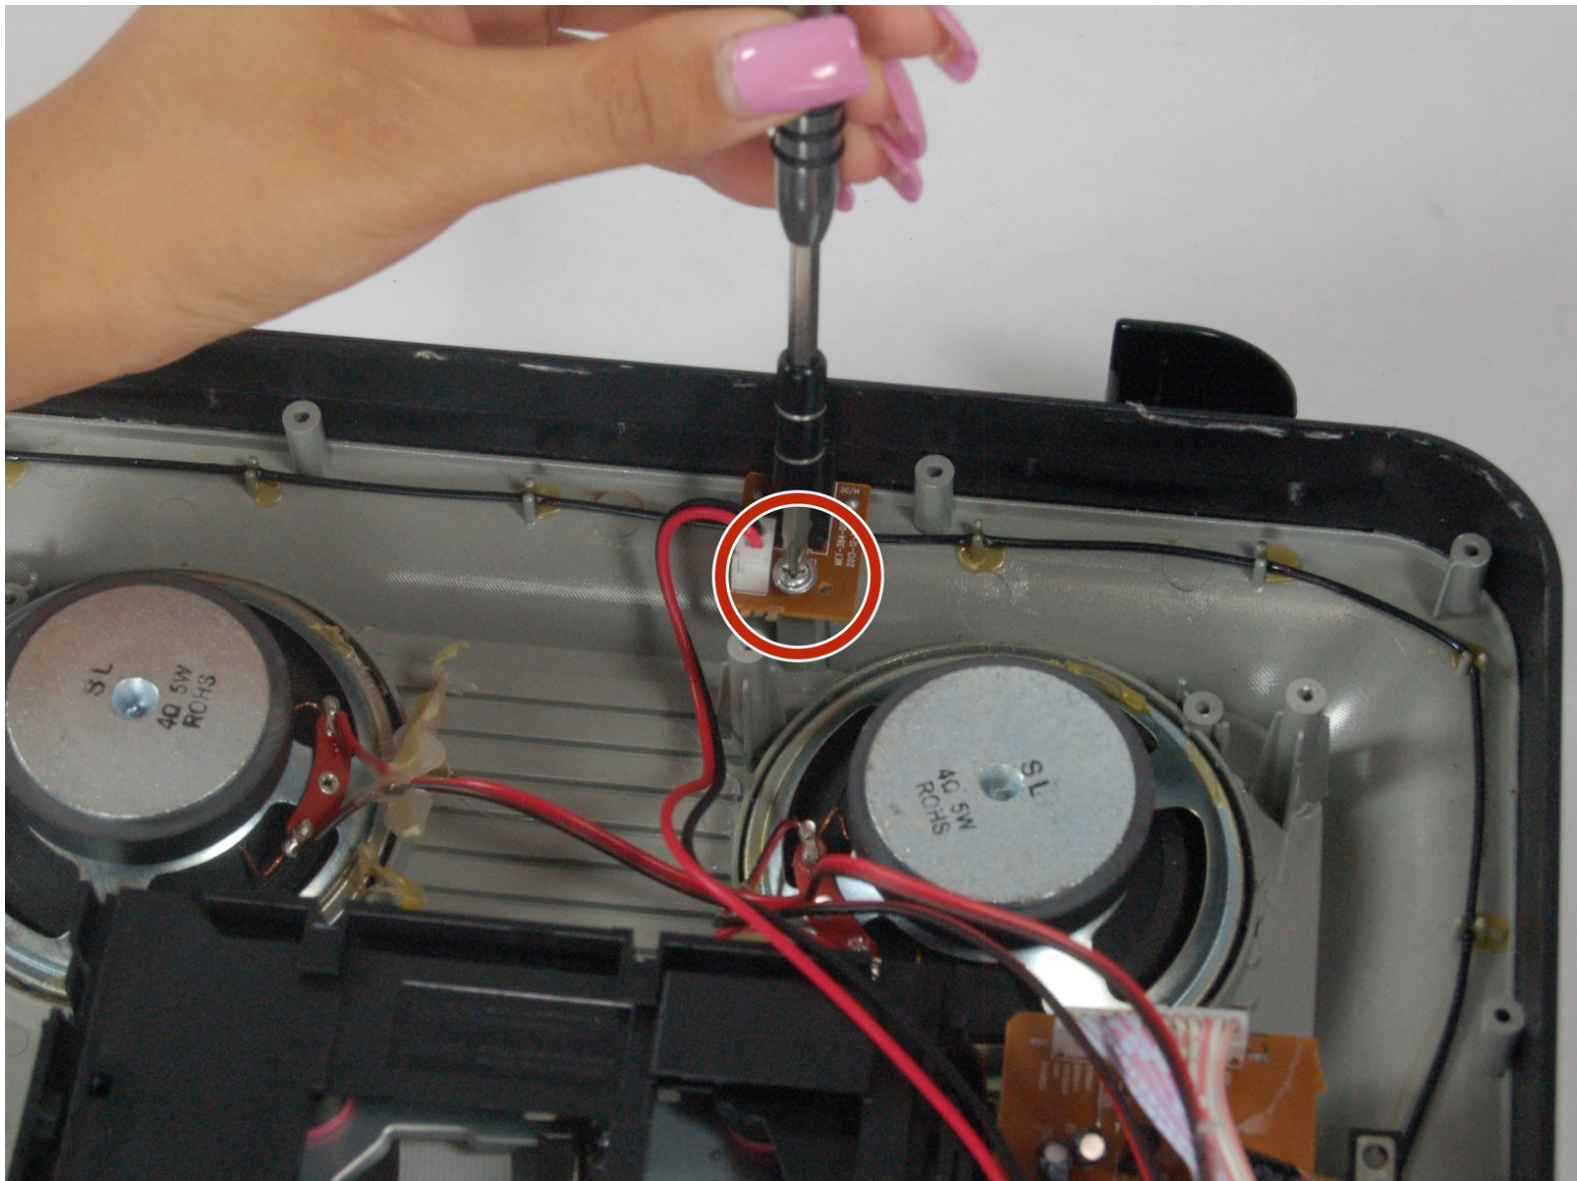

## INTRODUCTION

You will be replacing the AC power connector and cord in the device to make sure you will have power to the device.

---





### TOOLS:

- [iOpener](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-



## Step 1 — Top Cover

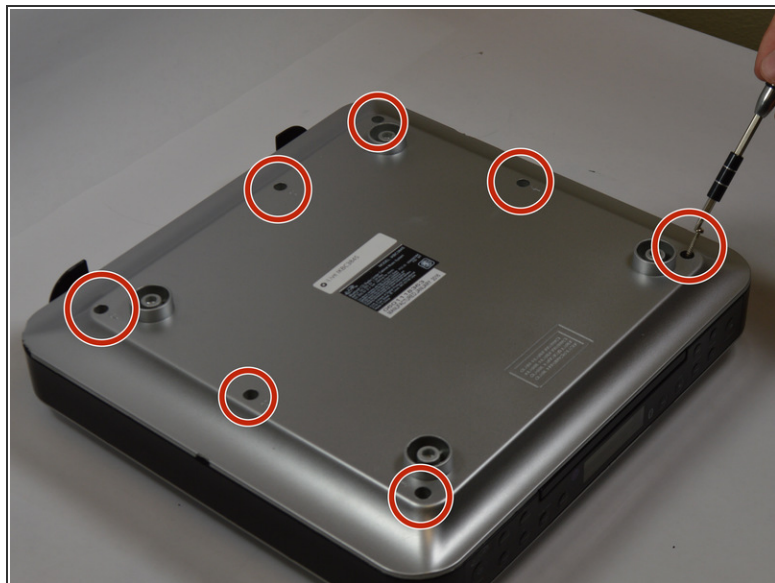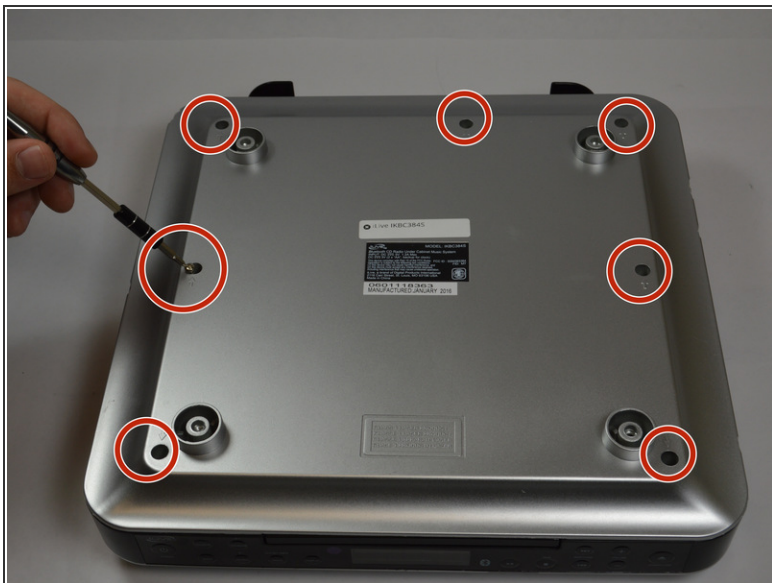

- Make sure you remove all seven 3 mm screws before proceeding to the next step.

## Step 2



- Use iOpener or heat gun on all sides except the front.


## Step 3



- Be cautious when taking the top of the device off there may still be some adhesive stuck to device.

⚠ The top of the device will be very difficult to remove because of the adhesive holding it together.


## Step 4 — Power cord and AC connector

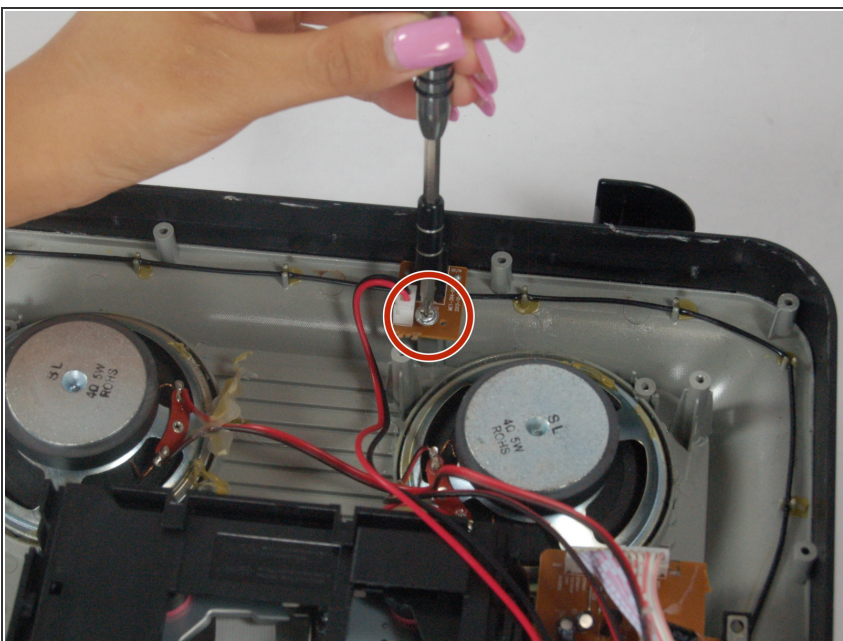

- Remove the one (13.5mm in length) screw holding the power connector and cord in place.



## Step 5

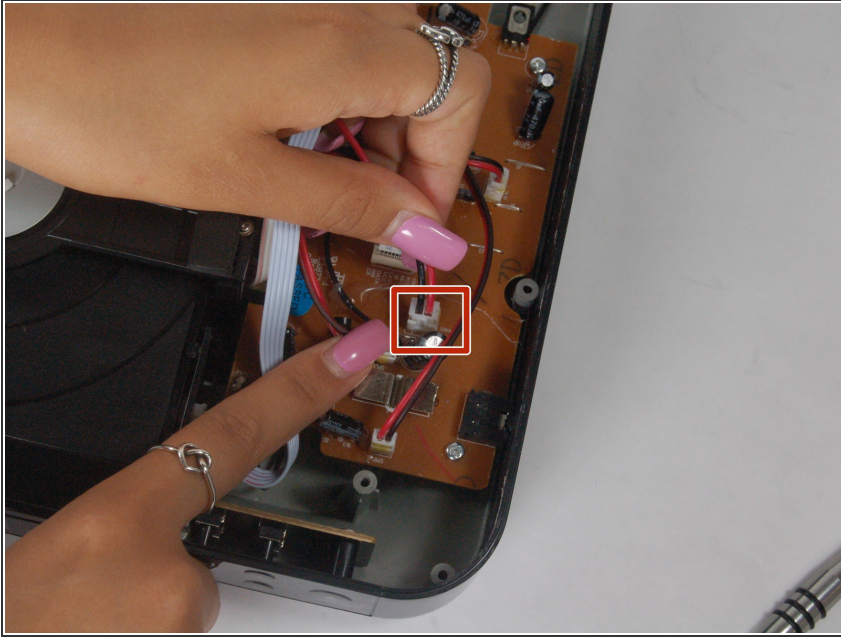

- Remove the power cord connected to the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-04 09:19:21 PM.